



|                         |                                 |
|-------------------------|---------------------------------|
| <b>Nastavni predmet</b> | RAČUNALNE MREŽE                 |
| <b>Naslov cjeline</b>   | Djelovanje u mrežnom sloju      |
| <b>Naslov jedinice</b>  | Vježba 7: Statičko usmjeravanje |

**Niko Mrkonjić, Bartol Neseć 3.B**

### **PRIPREMA ZA VJEŽBU**

1. Na koji način se informacije o putanji do odredišta unose u usmjerničku tablicu kod statičkog usmjeravanja?

Konfiguriranjem statičkih ruta od strane administratora, primjenom dinamičkih protokola usmjeravanja koji rade po nekom algoritmu gdje usmjernik preusmjerava pakete kroz različite mreže

2. Kako izgleda sintaksa za konfiguraciju statičke rute? Objasni na primjeru!

R1>enable

R1#configure terminal

R1(config)#ip route 172.16.30.0 255.255.255.0 S0/0/0

Drugi način:

R1>enable

R1#configure terminal

R1(config)#ip route 172.16.30.0 255.255.255.0 172.16.20.2

### **IZVOĐENJE VJEŽBE**

#### *Uvod*

Kao uređaji mrežnog sloja, usmjernici prosljeđuju i/ili usmjeravaju pakete podataka na udaljeno odredište uz pomoć IP adresa. Svako sučelje (port) rutera mora zbog toga imati svoju IP adresu. Jedna od njih pripada i zadanom pristupniku (default gateway-u), tj. sučelju koje ima zadaću da prosljeđuje podatke izvan lokalne mreže.

Kod međusobnog povezivanja dva usmjernika potrebno je odrediti koji će od njih biti „glavni“, što znači da će on određivati takt, odnosno brzinu prijenosa između usmjernika. Takav usmjernik ima oznaku DCE (Data circuit-terminating equipment), a onaj drugi ima oznaku DTE (Data terminal equipment).

Na jednom usmjerniku može jedno sučelje biti DCE, a drugo DTE.

Rute do udaljenih mreža mogu biti zadane ručno ili automatski. Ručno zadavanje vrši se konfiguriranjem statičkih ruta.


#### **Ciljevi vježbe:**

- Naučiti temeljnu konfiguraciju usmjernika
- Naučiti i izvesti konfiguraciju sučelja
- Naučiti i izvesti konfiguraciju statičke rute

**VAŽNO:** Sve postupke pažljivo upisati u bilježnicu.

Dobra je praksa izvršiti periodički pohranu konfiguracije u NVRAM naredbom **copy running-config startup-config**.

#### Temeljna konfiguracija

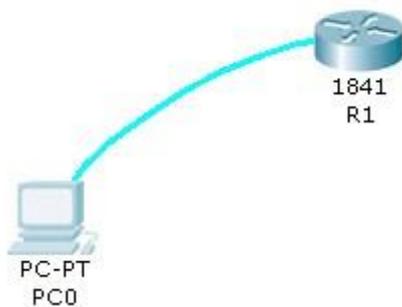

1. Spojiti usmjernik R1 sa računalom u ulozu terminala, rollover kabelom, kao na slici. Dvostrukim klikom odaberemo karticu Desktop, a zatim Terminal. Zadržati predložene postavke terminala.

```
Bits Per Second = 9600
Data Bits = 8
Parity = None
Stop Bits = 1
Flow Control = None
```

Na ponuđeno pitanje: Continue with configuration dialog? [yes/no] odgovorimo sa : no



2. Usmjernik koji prvi puta konfiguriramo trebao bi se nalaziti u početnom (defaultnom) stanju. Kako bismo bili potpuno sigurni da je tako, potrebno je izvršiti brisanje NVRAM-a od mogućih tragova prijašnjih konfiguracija. To možemo obaviti na slijedeći način:

```
Router>enable
```

```
Router#erase startup-config
```

```
Erasing the nvram filesystem will remove all configuration files! Continue? [confirm]
```

```
[OK]
```

```
Erase of nvram: complete
```

```
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
```

```
Router#reload
```

```
Proceed with reload? [confirm]
```

Pritisnemo Enter i pričekamo rebootanje usmjernika.

Nakon toga ponovno imamo:

```
Continue with configuration dialog? [yes/no]: no
```

```
Press RETURN to get started!
```

```
Router>
```

Sada je usmjernik u potpunosti spreman za konfiguraciju

3. Ulazak u pojedine CLI modove

- a) Ulazak u privilegirani mod:

```
Router>enable
```

```
Router#
```

- b) Ulazak u globalni konfiguracijski mod

```
Router#configure terminal
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
Router(config)#
```

- c) Ulazak u konfiguracijski mod usmjernika

```
Router(config)#router rip
```



**Router(config-router)#**

d) Ulazak u konfiguracijski mod sučelja

Ovdje je potrebno vratiti se korak natrag radi vraćanja u globalni konfiguracijski mod, naredbom **exit**

**Router(config-router)#exit**

**Router(config)#interface FastEthernet 0/0**

**Router(config-if)#**

e) Doznačavanje imena usmjerniku, ali iz globalnog konfiguracijskom moda (**exit**)

**Router(config)#hostname RB**

**RB(config)#**

#### 4. Pomoćne naredbe

- **exit** ..... vraćanje u niži mod
- **end** ..... vraćanje u privilegirani mod iz bilo kojeg moda
- **disable** ..... vraćanje iz privilegiranog moda u korisnički mod
- **history** ..... prikazuje nekoliko prethodno zadanih naredbi
- **Strelica prema gore** . prikazuje prethodnu naredbu
- **?** ..... pokazuje koje su naredbe na raspolaganju

#### 5. U privilegiranom ili u korisničkom modu pored prompta ukucajte kombinaciju slova koju IOS ne razumije (npr. svoje ime):

**Router>ivan**

odgovor operacijskog sustava će biti:

**Translating "ivan" ...domain server (255.255.255.255)** , poslije čega slijedi pauza koja traje oko 40 sekundi.

Da biste to izbjegli potrebno je u globalnom konfiguracijskom modu ukucati slijedeće naredbu:

**RB(config)#no ip domain-lookup**

Provjerite da li ovo funkcionira.

a) Pohranjivanje do sada izvršene konfiguracije izvodimo na poznati način:


```
RB#copy running-config startup-config Destination
filename [startup-config]?
Building configuration...
[OK]
RB#
```

b) Ukoliko poželimo vidjeti konfiguraciju koja je pohranjena, zadajemo naredbu  
**RB#show running-config**

d) Odspojiti terminal, isključiti ruter prekidačem (kartica Physical), a zatim sve ponovno spojiti. Da li su sve postavke na ruteru zadržane?

## Statičko usmjeravanje

Topologija:

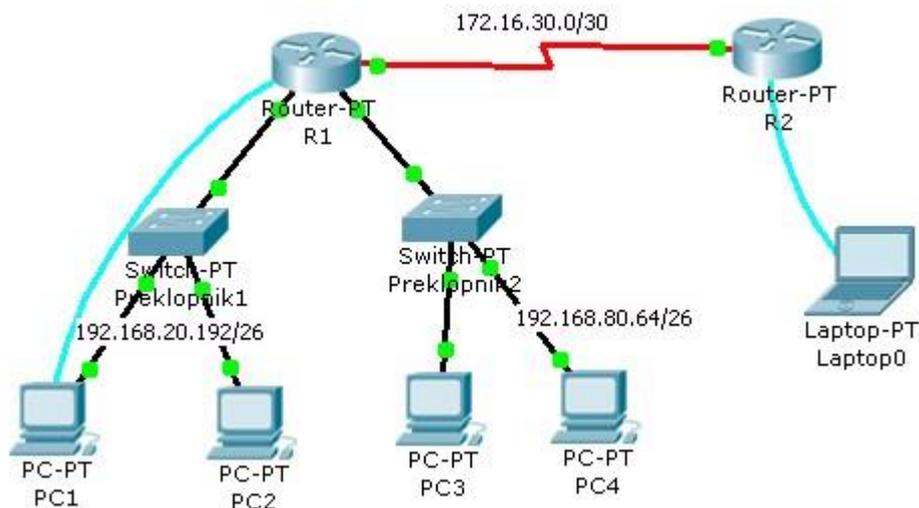

Tablica adresa

| Uređaj | Adresa fastethernet sučelja | Oznaka sučelja | Mrežna maska    | Oznaka Serijskog sučelja | Tip serijskog sučelja | Adresa serijskog sučelja | Mrežna maska    | Default gateway |
|--------|-----------------------------|----------------|-----------------|--------------------------|-----------------------|--------------------------|-----------------|-----------------|
| R1     | 192.168.20.193              | 0/0            | 255.255.255.192 | S2/0                     | DCE                   | 172.16.30.1              | 255.255.255.252 |                 |
|        | 192.168.80.65               | 1/0            | 255.255.255.192 |                          |                       |                          |                 |                 |
| R2     |                             |                |                 | S2/0                     | DTE                   | 172.16.30.2              | 255.255.255.252 |                 |



|     |                |  |  |  |  |  |  |                |
|-----|----------------|--|--|--|--|--|--|----------------|
| PC1 | 192.168.20.194 |  |  |  |  |  |  | 192.168.20.193 |
| PC2 | 192.168.20.195 |  |  |  |  |  |  | 192.168.20.193 |
| PC3 | 192.168.80.66  |  |  |  |  |  |  | 192.168.80.65  |
| PC4 | 192.168.80.67  |  |  |  |  |  |  | 192.168.80.65  |

Zadaci:

1. U PT-u spoji uređaje prema zadanoj topologiji i izvrši temeljnu konfiguraciju usmjernika, koristeći spojena računala kao terminale (rollover kabel). Na R2 također dodaj terminal radi konfiguracije.
2. Konfiguriraj sučelja na usmjerniku R1, koristeći priloženu tablicu adresa.

Postupak za usmjernik R1:

a) Konfiguracija fastethernet sučelja

```
R1(config)#interface fastethernet 0/0
R1(config-if)#ip address 192.168.20.193 255.255.255.192
R1(config-if)#no shutdown
```

```
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
Ponoviti postupak i za sučelje FE 1/0
```

b) Konfiguracija serijskog sučelja 2/0 (DCE)

```
R1(config)#interface serial 2/0
R1(config-if)#ip address 172.16.30.1 255.255.255.252
R1(config-if)#clock rate 64000
R1(config-if)#no shutdown
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
R1(config-if)#
```

3. Konfiguriraj sučelje na usmjerniku R2, uz pomoć tablice adresa

a) Konfiguracija serijskog sučelja 2/0

```
R2(config)#interface serial 2/0
R2(config-if)#ip address 172.16.30.2 255.255.255.252
R2(config-if)#no shutdown
R2(config-if)#
```

4. Pinganjem provjeri da li postoji povezanost između računala u jednoj i drugoj Ethernet mreži. Rezultate zapiši u bilježnicu.

PC1

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.195

Pinging 192.168.20.195 with 32 bytes of data:

Reply from 192.168.20.195: bytes=32 time<1ms TTL=128
Reply from 192.168.20.195: bytes=32 time<1ms TTL=128
Reply from 192.168.20.195: bytes=32 time<1ms TTL=128
Reply from 192.168.20.195: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.195:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.80.66

Pinging 192.168.80.66 with 32 bytes of data:

Reply from 192.168.80.66: bytes=32 time<1ms TTL=127
Reply from 192.168.80.66: bytes=32 time<1ms TTL=127
Reply from 192.168.80.66: bytes=32 time<1ms TTL=127
Reply from 192.168.80.66: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.80.66:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

5. Pinganjem provjeri dohvatljivost default gatewaya za svaku mrežu. Rezultate zapiši u bilježnicu.



```
C:\>ping 192.168.20.193

Pinging 192.168.20.193 with 32 bytes of data:

Reply from 192.168.20.193: bytes=32 time<1ms TTL=255
Reply from 192.168.20.193: bytes=32 time<1ms TTL=255
Reply from 192.168.20.193: bytes=32 time<1ms TTL=255
Reply from 192.168.20.193: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.20.193:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.80.65

Pinging 192.168.80.65 with 32 bytes of data:

Reply from 192.168.80.65: bytes=32 time<1ms TTL=255
Reply from 192.168.80.65: bytes=32 time<1ms TTL=255
Reply from 192.168.80.65: bytes=32 time<1ms TTL=255
Reply from 192.168.80.65: bytes=32 time=4ms TTL=255

Ping statistics for 192.168.80.65:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 4ms, Average = 1ms
```

6. Pinganjem sa bilo kojeg računala provjeri dohvatljivost serijskog sučelja S2/0 usmjernika R2 (iz naredbenog retka -cmd). Obrazloži rezultat pinganja.

```
C:\>ping 172.16.30.2

Pinging 172.16.30.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.16.30.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

7. U **simulation** modu uputi ICMP paket sa bilo kojeg računala na R1, a zatim na R2. Opiši što se je dogodilo. Zbog čega ICMP request dohvaća R2, ali se reply ne vraća natrag?  
Otišao je paket od PC1 do R1 i nazad te ga je prihvatio. Od PC1 dođe do R2 ali se ne vraća nazad jer nije konfigurirano.
8. Naredbom **show ip route** na usmjernicima R1 i R2 provjeri stanje ruting tablice. Ispiši koje su mreže navedene u tablici.





```
Router>show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.16.0.0/30 is subnetted, 1 subnets
C       172.16.30.0 is directly connected, Serial2/0
      192.168.20.0/26 is subnetted, 1 subnets
C       192.168.20.192 is directly connected, FastEthernet0/0
      192.168.80.0/26 is subnetted, 1 subnets
C       192.168.80.64 is directly connected, FastEthernet1/0

Router>
```

```
Router>show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.16.0.0/30 is subnetted, 1 subnets
C       172.16.30.0 is directly connected, Serial3/0

Router>
```

#### 9. Konfiguriraj statičku rutu na R2

```
R2(config)#ip route 192.168.20.192 255.255.255.192 172.16.30.1
```

```
R2(config)#ip route 192.168.80.64 255.255.255.192 172.16.30.1
```

#### 10. Naredbom show ip route na oba usmjernika provjeri stanje usmjerničkih tablica. Ispiši koje su mreže navedene u tablici.



```
Router>show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

172.16.0.0/30 is subnetted, 1 subnets
C    172.16.30.0 is directly connected, Serial3/0
192.168.20.0/26 is subnetted, 1 subnets
S    192.168.20.192 [1/0] via 172.16.30.1
192.168.80.0/26 is subnetted, 1 subnets
S    192.168.80.64 [1/0] via 172.16.30.1
```

11. Pinganjem provjeri povezanost sa usmjernikom R2 sa jedne i druge Ethernet mreže. Kakav je rezultat pinganja iz naredbenog retka (cmd), a kakav upućivanjem ICMP paketa u **simulation** modu?

```
C:\>ping 172.16.30.2

Pinging 172.16.30.2 with 32 bytes of data:

Reply from 172.16.30.2: bytes=32 time=18ms TTL=254
Reply from 172.16.30.2: bytes=32 time=12ms TTL=254
Reply from 172.16.30.2: bytes=32 time=12ms TTL=254
Reply from 172.16.30.2: bytes=32 time=1ms TTL=254

Ping statistics for 172.16.30.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 18ms, Average = 10ms
```